

SUNSCREEN

BY JINWU

高端工程
卷帘遮阳面料


阳光面料 津武制造

WA30 Series


WA40 Series

B series


WA3002

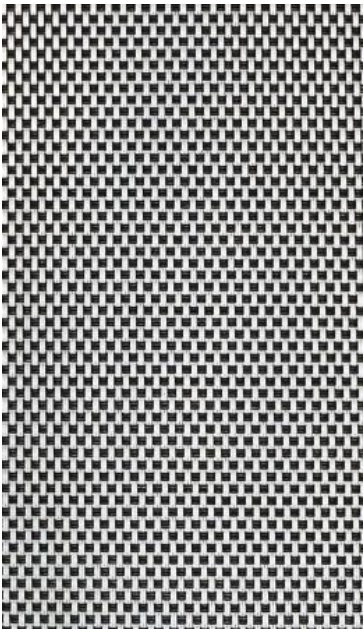


WA4002

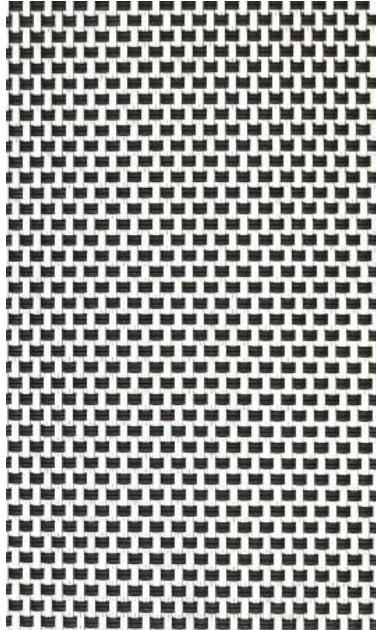


B-03

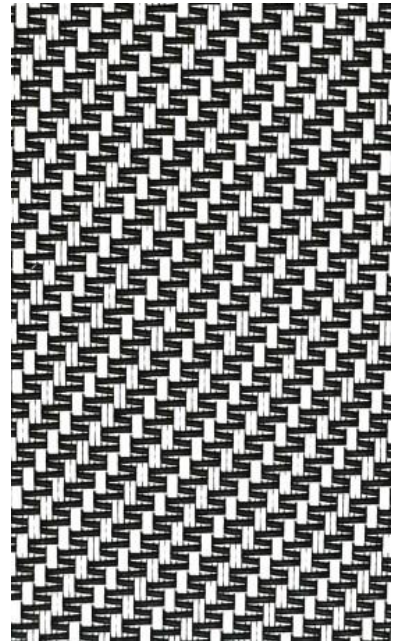


WA3005

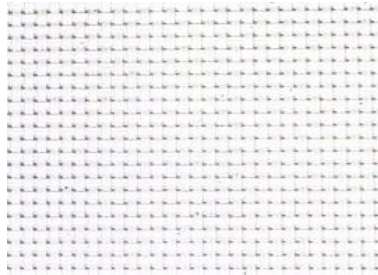

WA4001

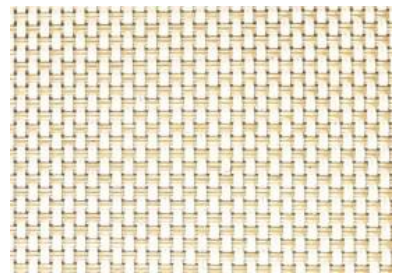

WA4003

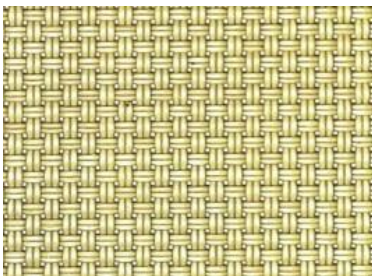


WA4015




WA4024



B-01

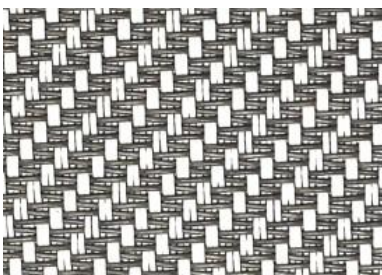

B-02

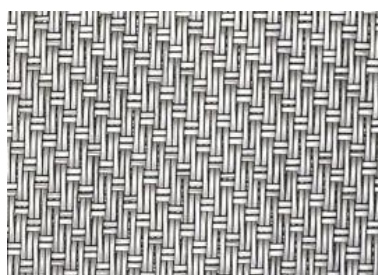

B-04



B-05

SUNSCREEN

INFORMATION

参数信息

	SPECIFICATIONS (技术参数)		
	WA40 series	WA30 series	B series
Composition(成分)	30% Polyester + 70% PVC	30% Polyester + 70% PVC	30% Fiberglass + 70% PVC
Finished Width(幅宽)	200/250/300/320 cm	200/250/300/320 cm	200/250/300/320 cm
Roll Length(卷长)	30m	30m	30m
Thickness(厚度)	0.71mm ± 5%	0.56 mm ± 5%	0.6mm
Weight per m ² (克重)	520g ± 5%	420g ± 5%	450g ± 5%
Yarn Count(经纬密)	36*36	48*46	48*46
Color Fastness(色牢度)	7 级	7 级	7 级
Cutting (加工方式)	Cold Cut, Ultrasonic, Crush Cut, or Laser Seaming/Hemming: Thermal, High-Frequency, Ultrasonic or Sewing 切割:冷切、超声波、压剪、激光; 缝制/包边: 加热、高频、超声波或缝纫		
Openness Factor (开孔率)	5% JINWU could supply SunScreen of Openness Factor 1%, 3%, 5% ,and 15%, 25%. 津武公司可以提供 1%, 3%, 5%, 15%, 25%等不同开孔率的遮阳面料。		

BY JINWU

阳光面料 津武制造